

7" FPV Monitor with  
Dual 5.8GHz 4 Bands  
Wireless Receivers

329/DW  
(with dual 5.8GHz receivers)

329/W  
(with single 5.8GHz receiver)



FEATURES


- › 4 Bands and total 31 channels
- › Built-in dual 5.8GHz receivers
- › Auto antenna switching to get best signal
- › High brightness: 400cd/m²
- › Snow screen, no more "blue" screen
- › 75mm VESA standard mount

Specific Monitor by LILLIPUT for Flying Camera System.  
Application for Aerial & Outdoor Photography.  
Strongly recommend for aerial enthusiast & professional photographer.

APPEARANCE



OUTLINE DIMENSION

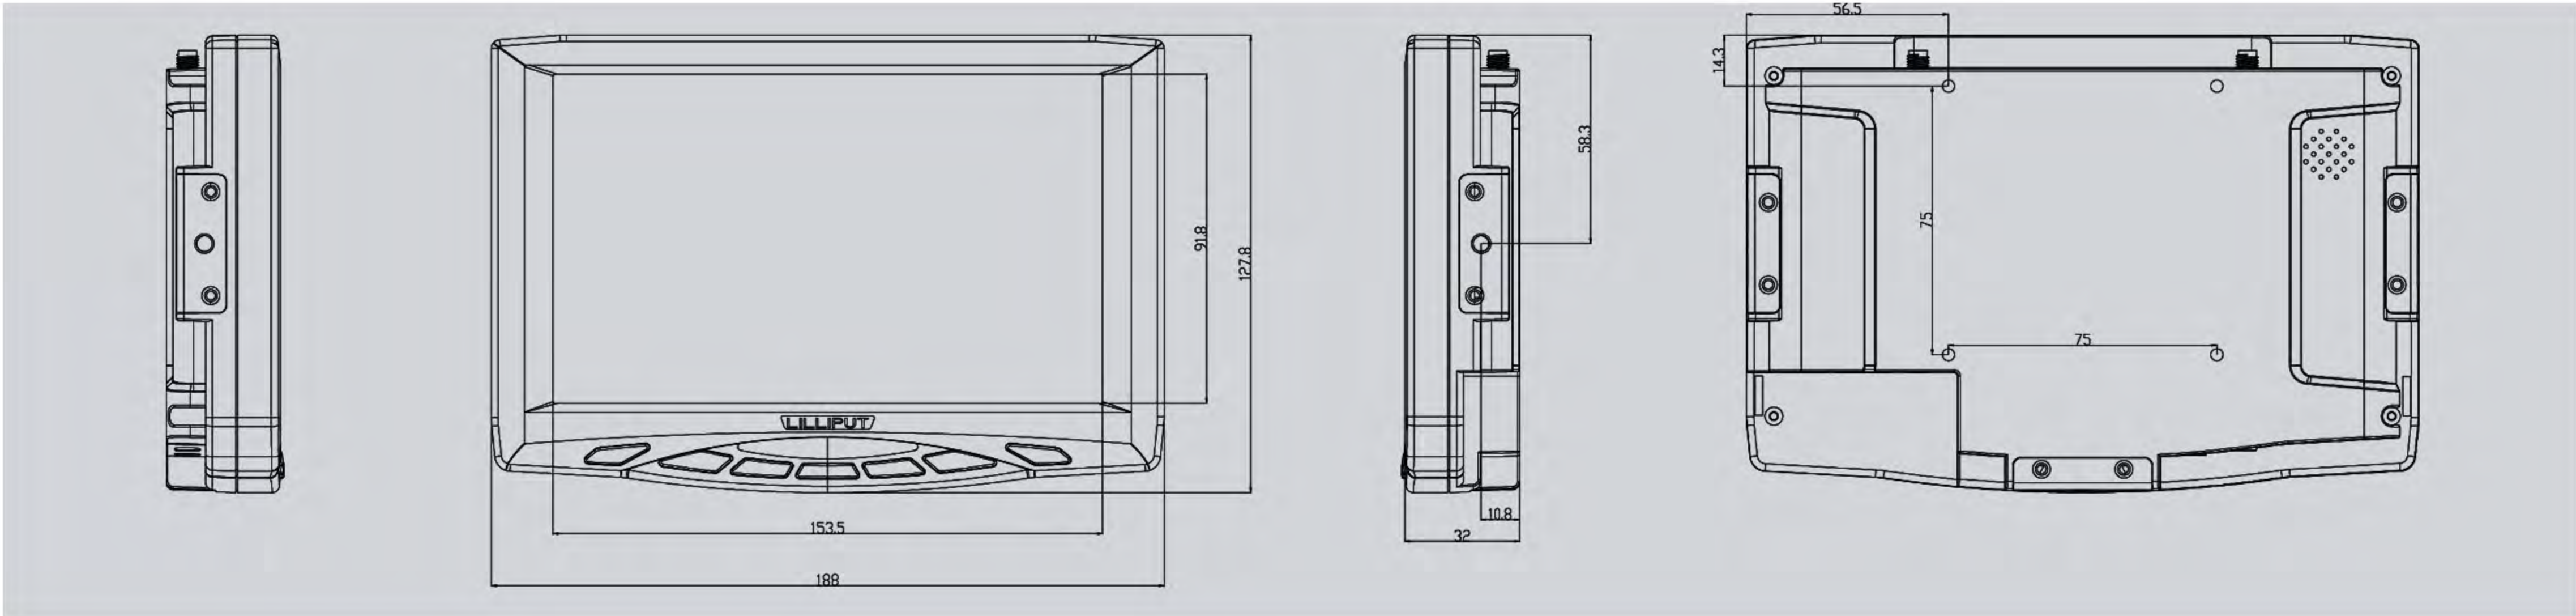

WIRELESS RECEIVER

31 - Channel Parameters (MHz)

|           |           |           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| CH1 5705  | CH2 5685  | CH3 5665  | CH4 5645  | CH5 5885  | CH6 5905  | CH7 5925  | CH8 5945  |
| CH9 5865  | CH10 5845 | CH11 5825 | CH12 5805 | CH13 5785 | CH14 5765 | CH15 5745 | CH16 5725 |
| CH17 5733 | CH18 5752 | CH19 5771 | CH20 5790 | CH21 5809 | CH22 5828 | CH23 5847 | CH24 5866 |
| CH25 5740 | CH26 5760 | CH27 5780 | CH28 5800 | CH29 5820 | CH30 5840 | CH31 5860 |           |

SPECIFICATIONS / ACCESSORIES

|                   |                       |                                                           |                                               |          |
|-------------------|-----------------------|-----------------------------------------------------------|-----------------------------------------------|----------|
| DISPLAY           | Panel                 | 7" LED backlit                                            | 1. Sun shade                                  | 1 piece  |
|                   | Physical Resolution   | 800 × 480                                                 | 2. 12V DC adapter                             | 1 piece  |
|                   | Aspect Ratio          | 16:9                                                      | 3. AV input cable                             | 1 piece  |
|                   | Brightness            | 400cd/m²                                                  | 4. AV output cable                            | 1 piece  |
| INPUT             | Contrast              | 500:1                                                     | 5. VESA battery plate                         | 1 piece  |
|                   | Viewing Angle         | 140° / 120° (H/V)                                         | 6. Battery plate                              | 2 Pieces |
| OUTPUT            | Composite             | 1                                                         | 7. Remote control                             | 1 piece  |
|                   | Antenna Port          | 2 (for 329/DW only)                                       | 8. 5.8GHz wireless AV receiver                | 1 piece  |
| AUDIO             | 9. Manual             |                                                           | 10. 5.8GHz wireless AV receiver (optional)    | 1 piece  |
|                   | Current               | 450mA                                                     | 11. 5.8GHz omnidirectional antenna (optional) | 1 piece  |
| POWER             | Input Voltage         | DC 12V                                                    | 12. Shoe mount (optional)                     | 1 piece  |
|                   | Battery Plate         | V-mount / Anton Bauer mount / F970 / QM91D / DU21 / LP-E6 |                                               |          |
| ENVIRONMENT       | Power Consumption     | ≤6W                                                       |                                               |          |
|                   | Operating Temperature | -20°C~60°C                                                |                                               |          |
| OUTLINE DIMENSION | Storage Temperature   | -30°C~70°C                                                |                                               |          |
|                   | Dimension(LWD)        | 188 × 127.8 × 32 mm                                       |                                               |          |
|                   | Weight                | 415g                                                      |                                               |          |