

7" LED Camera-top Monitor

LILLIPUT®

Specific Monitor by LILLIPUT with Broadcast Quality for DSLR & Full HD Camcorder
Application for Taking Photos & Making Movies. Strongly recommend for DSLR fans & directors!

664

664/P

664/O

664/O/P



Audio Level Meter

Audio bars display to check audio phase and levels.
For generating accurate audio level displays.



1.2cm
2.3cm



Shortcut for Camera Shutter

Shooting conveniently via the shutter button shortcut on monitor instead of camera's.



Slimmer design

365g ONLY!

- >> Shutter shortcut button
- >> Audio level meter
- >> 178° Wide viewing angles
- >> High resolution: 1280×800
- >> High brightness: 400cd/m²
- >> High contrast: 800:1
- >> Wide voltage: DC 7-24V






APPEARANCE



OUTLINE DIMENSION

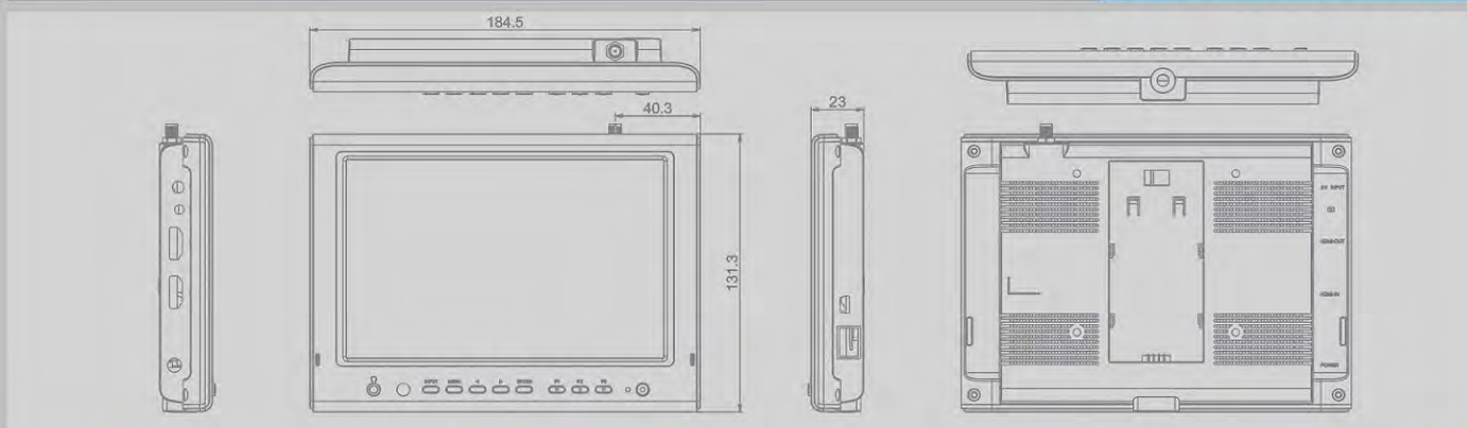

ADVANCED FUNCTIONS



✓ Values can be adjust under level meter, peaking & exposure functions, etc.



SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	7" LED backlit (IPS)	1. Folding sun shade	1 piece
	Physical Resolution	1280 × 800	2. Battery plate (F-970, QM91D, DU21 or LP-E6)	2 pieces
	Aspect Ratio	16:10	3. HDMI A/C cable	1 piece
	Brightness	400cd/㎡	4. Composite cable	1 piece
	Contrast	800:1	5. *Shutter release cable	2 pieces
	Viewing Angle	178° / 178° (H/V)	6. Shoe mount	1 piece
INPUT	HDMI	1	7. 12V DC adapter	1 piece
	Composite	1 (PAL/NTSC)	8. Manual	1 copy
	Wireless AV	1 (optional)	9. Battery plate bracket	1 piece
OUTPUT	Shutter Port	1 (for shutter release cable)	10. V-mount / Anton Bauer mount (optional)	1 piece
	HDMI	1	11. Suitcase (optional)	1 piece
AUDIO	Speaker	1(built-in)		
	Ear Phone Slot	1		
POWER	Current	960mA		
	Input Voltage	DC 7-24V		
	Battery Plate	V-mount / Anton Bauer mount / F-970 / QM91D / DU21 / LP-E6		
ENVIRONMENT	Power Consumption	≤12W		
	Operating Temperature	-20℃~60℃		
	Storage Temperature	-30℃~70℃		
OUTLINE DIMENSION	Dimension(LWD)	184.5 × 131 × 23 mm		
	Weight	365g		

*For Canon, Nikon, SONY & Panasonic cameras.